


Saw Filter Specifications

Item		Minimum	Typical	Maximum	Unit	
Center Frequency	fc	-	1747.50	-	MHz	
Insertion Loss(min)			1.5	2.0	dB	
Insertion Loss	1710.00-1785.00MHz	IL	-	2.5	3.0	dB
Amplitude Ripple(p-p)	1710.00-1785.00MHz	Δa	-	2.0	3.0	dB
Group Delay Ripple	1710.00-1785.00MHz	GDR	-	18.0	40.0	nS
Absolute Attenuation	a					
	DC-960.00MHz		20.0	25.0	-	dB
	960.00-1690.00MHz		20.0	25.0	-	dB
	960.00-1693.00MHz		15.0	20.0		dB
	1802.00-1805.00MHz		20.0	25.0		dB
	1805.00-1880.00MHz		25.0	30.0		dB
	1880.00-3200.00MHz		23.0	28.0		dB
	3200.00-5000.00MHz		4.0	28.0		dB
VSWR	17100.00-1785.00MHz		1.8:1	2.0:1	/	

Package & Dimension

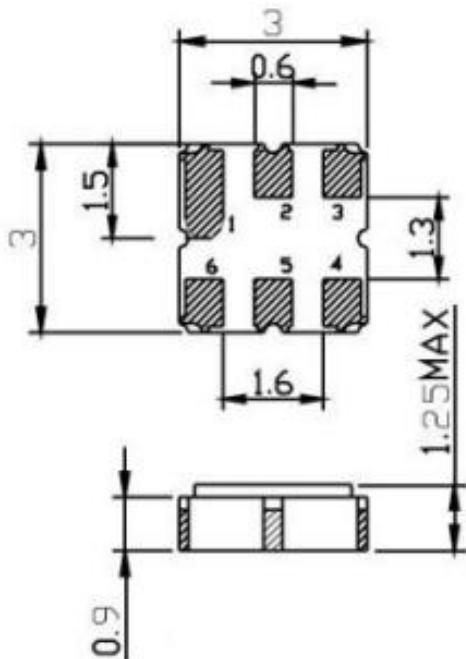

PinNo.	Description
2	Input
5	Output
1,3,4,6	Ground

Performance

