


DC-3920 MHz Low Pass Filter Specifications

Serial	Parameters	
1	Pass Band Frequency	DC ~ 3.92GHz
2	Pass Band Insertion Loss	≤2.0dB
3	Pass Band Return Loss	≥12dB
4	Stop Band Rejection	≥15dB @ 4000 MHz ≥30dB @ 4200~6000 MHz
5	Impedance	50 Ohms
6	Power Handling	1W
7	Connectors	SMA-Male / SMA-Female
8	Surface Finish	Painted Black
9	Temperature Range	-15°C ~ +50°C
10	Dimensions	150*40*25mm
11	Net weight	TBD
12	Configuration	As below (Tolerance: ±0.3mm)



Performance

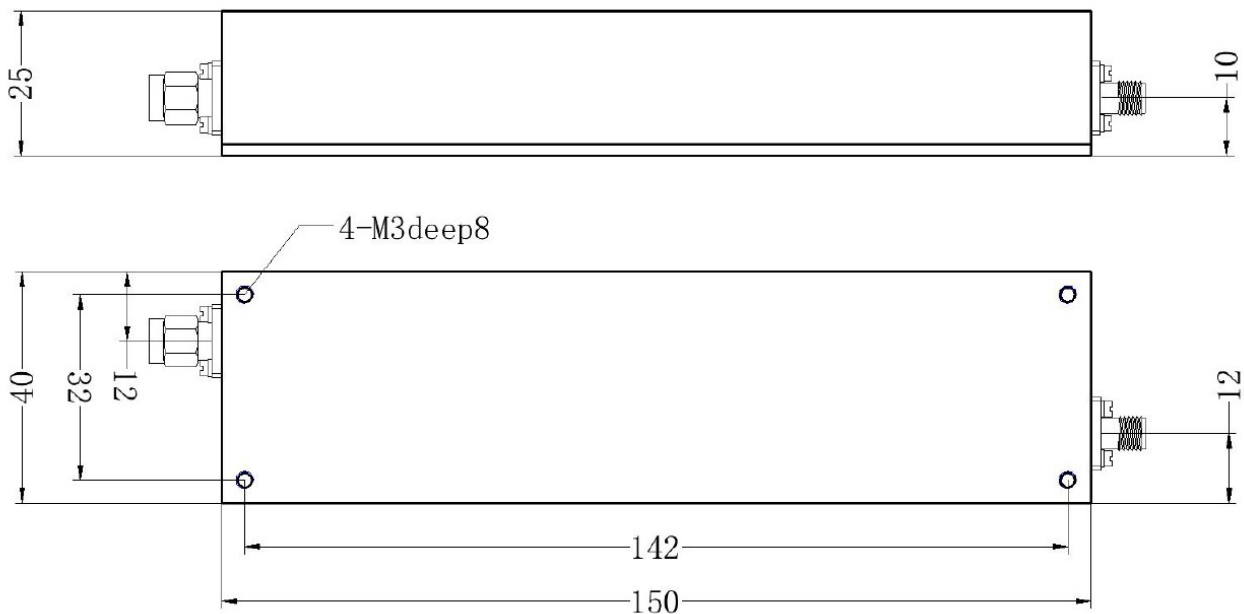